
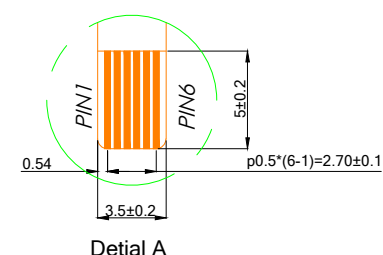


# Front VIEW

# Back VIEW

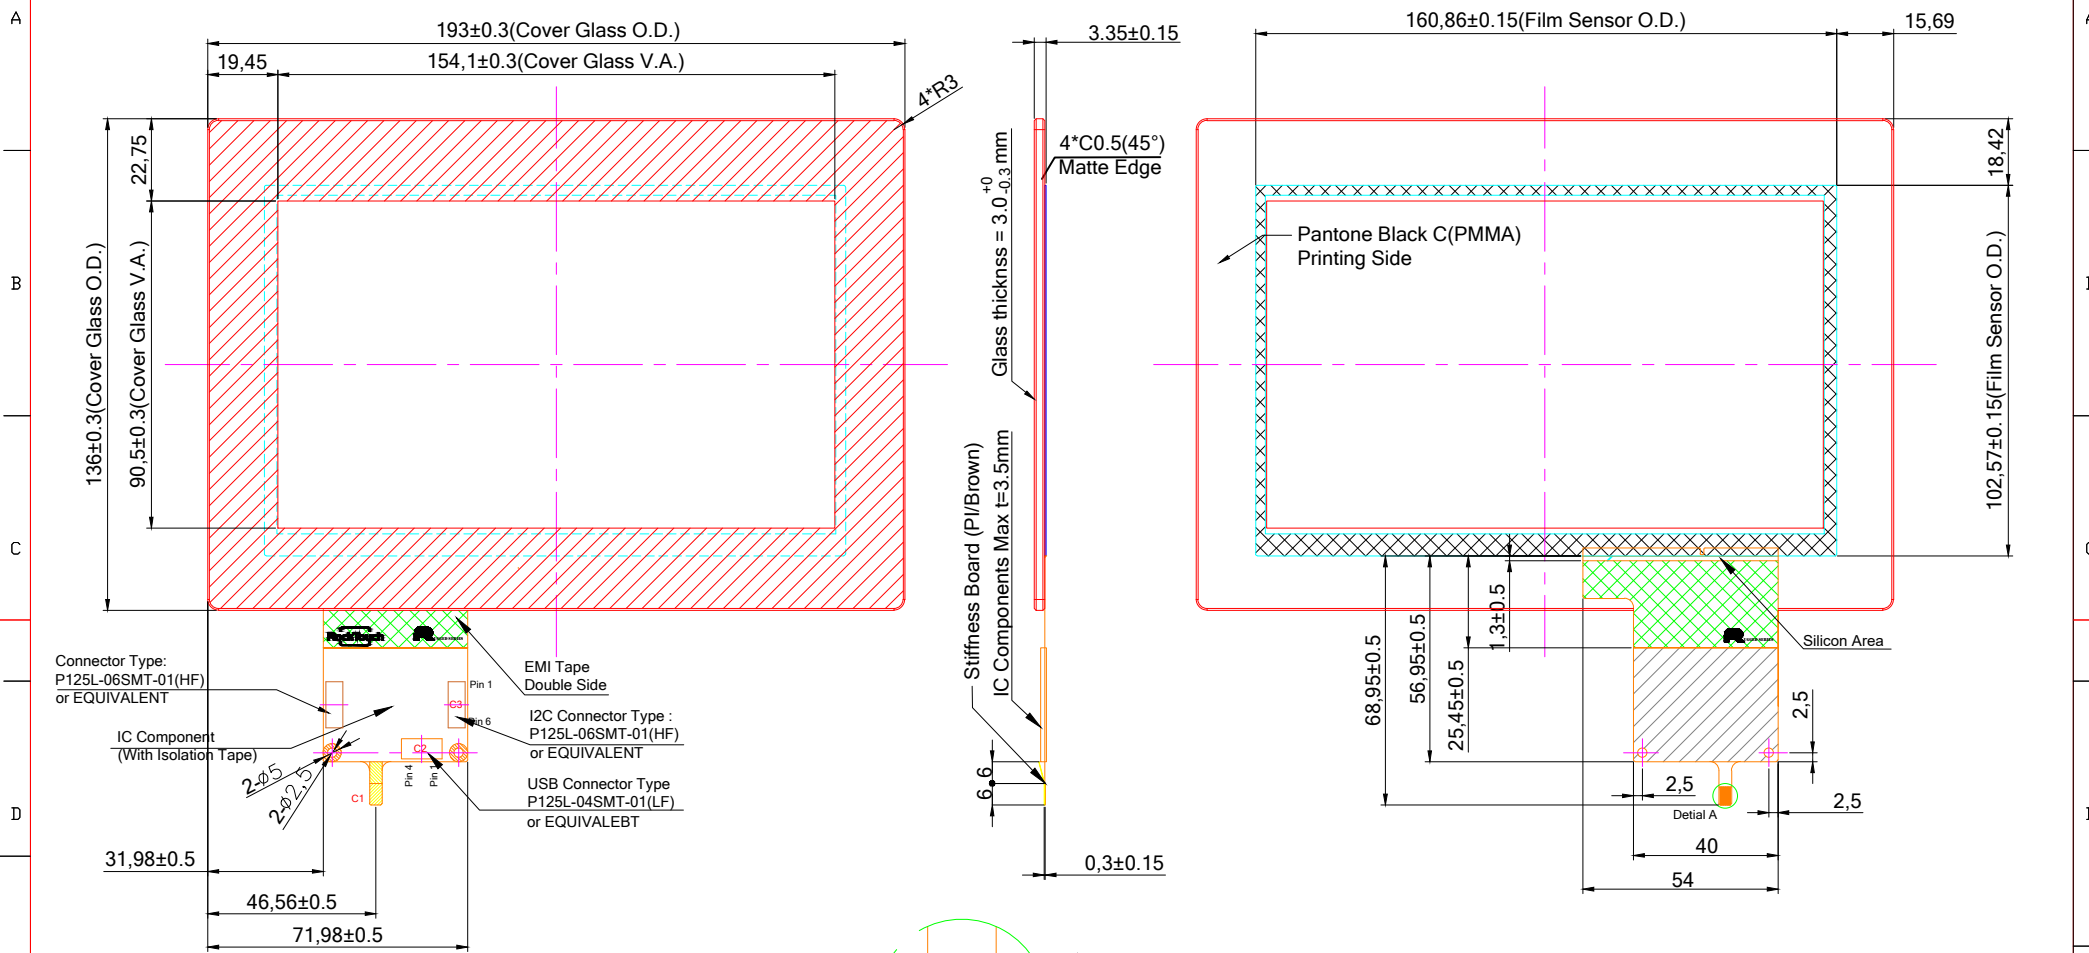

| C1:USB Interface |         | C2: Pin Define for USB 4 pin |     | C3: Pin Define for I2C 6 pin |         |
|------------------|---------|------------------------------|-----|------------------------------|---------|
| Pin 01           | VDD(5V) | Pin 01                       | GND | Pin 01                       | GND     |
| Pin 02           | D-      | Pin 02                       | D-  | Pin 02                       | SDA     |
| Pin 03           | D+      | Pin 03                       | D+  | Pin 03                       | SCL     |
| Pin 04           | GND     | Pin 04                       | VDD | Pin 04                       | VDD(5V) |
| Pin 05           | RST     |                              |     | Pin 05                       | INT     |
| Pin 06           | NC      |                              |     | Pin 06                       | RST     |

|                   |     |             |           |                   |             |
|-------------------|-----|-------------|-----------|-------------------|-------------|
| Customer Approval |     | Part Number |           | RTPC070W-R30003-C |             |
| Date              | Rev | Date        | Person    | Description       |             |
| Company           |     |             |           |                   |             |
| Name              |     |             |           |                   |             |
| Signature         |     | Date        | Design By | Check By          | Approved By |
|                   |     | 20190102    | Jeff      |                   |             |

- Spec:
- 1. General O.D. Tolerance :  ±0.3
  - 2. Border Type :  Matte
  - 3. Glass Type :  Semi-Tempered
  - 4. Surface Treatment :  None
  - 5. Background Printing :  PMMA  Color 1:Pantone Black C
  - 6. Logo Printing :  None
  - 7. Transmittance Level : >85%
  - 8. Important Notes :
- Note:
- A. Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen
  - B. If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference
  - C. Refer to the integration guide to avoid any integration noise issue
  - D. Before mass production customer needs to ask custom firmware for his final machine

Date \_\_\_\_\_ Drawing Number \_\_\_\_\_

