

1

2

3

4




5

6


7

8

不含背胶厚度

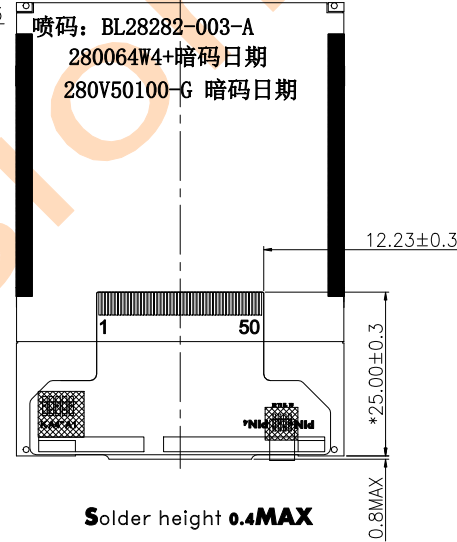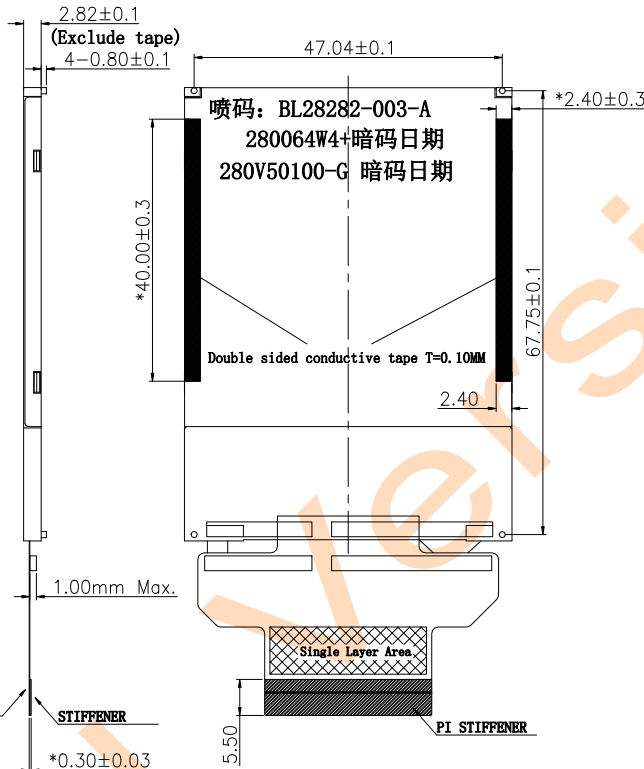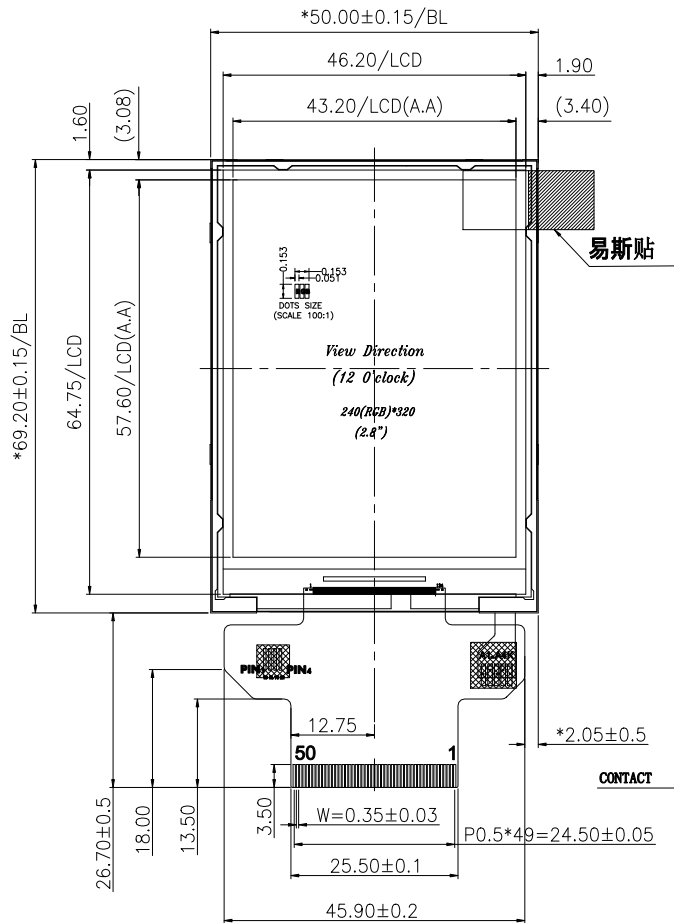

FPC bending
Unbend to delivery



IF=80MA, VF=3.0±0.3V

1	LEDK	26	DB6
2	LEDA1	27	DB5
3	LEDA2	28	DB4
4	LEDA3	29	DB3
5	LEDA4	30	DB2
6	IM0	31	DB1
7	IM1	32	DB0
8	IM2	33	SDO
9	IM3	34	SDI
10	RESET	35	RD
11	VSYNC	36	WRX (D/CX)
12	HSYNC	37	D/CX (SCL)
13	DOTCLK	38	CSX
14	DE	39	TE
15	DB17	40	VDDI
16	DB16	41	VDDI
17	DB15	42	VCI
18	DB14	43	GND
19	DB13	44	X+ (XR)
20	DB12	45	Y+ (YD)
21	DB11	46	X- (XL)
22	DB10	47	Y- (YU)
23	DB9	48	GND
24	DB8	49	GND
25	DB7	50	GND

Specification:

- 1). Viewing angle: 12 O'clock
- 2). Display mode: 262K TFT/Transmissive/Normally White
- 3). Operating temp: -10° C~60° C
- 4). Storage temp: -20° C~70° C
- 5). LCD Driver IC: ILI9341V
- 6). FPC MEET WITH CONNECTOR:
- 7). Backlight: 4 chip White LED (If=80mA, Vf=3.0V)
- 8). General Tolerance: ±0.2
- 9). MARK "*" IS THE IMPORTANT DIMENSION
- 10). ROHS Request

		深圳市福瑞达显示技术有限公司 Shenzhen Frida LCD Co., Ltd				Page	1/1
						DRAWING	LYY
TITLE.	LCM	REV.	UNIT	SIZE		CHECK	
MODEL.	FRD280V50100-G	v0	mm	A4		APPROVE	