

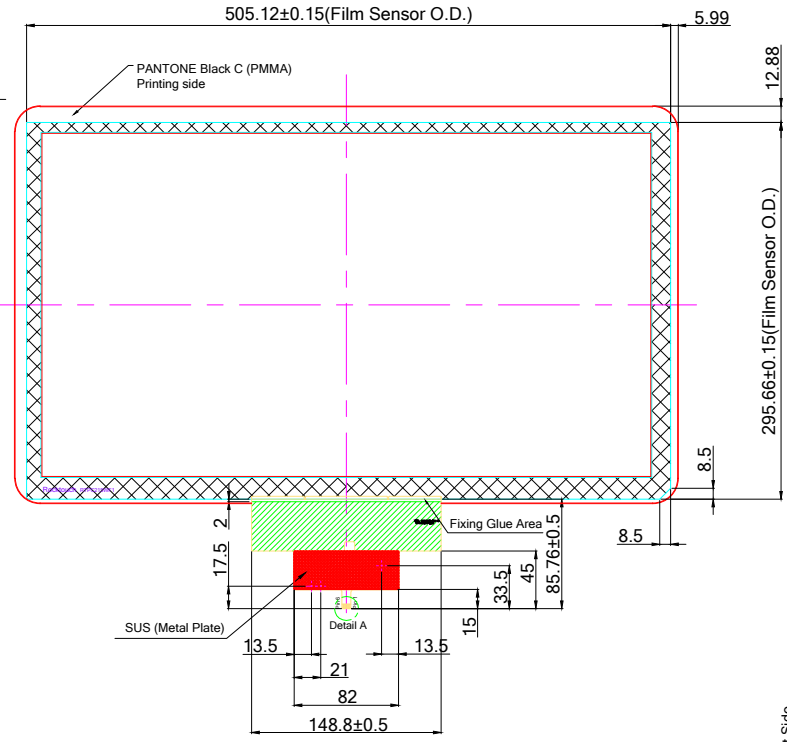
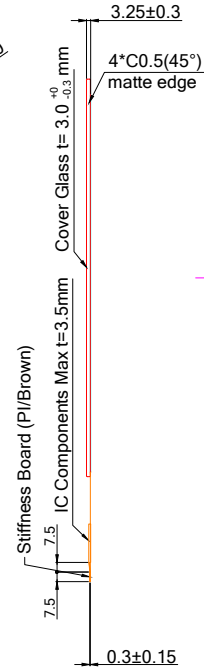


Front VIEW

Back VIEW

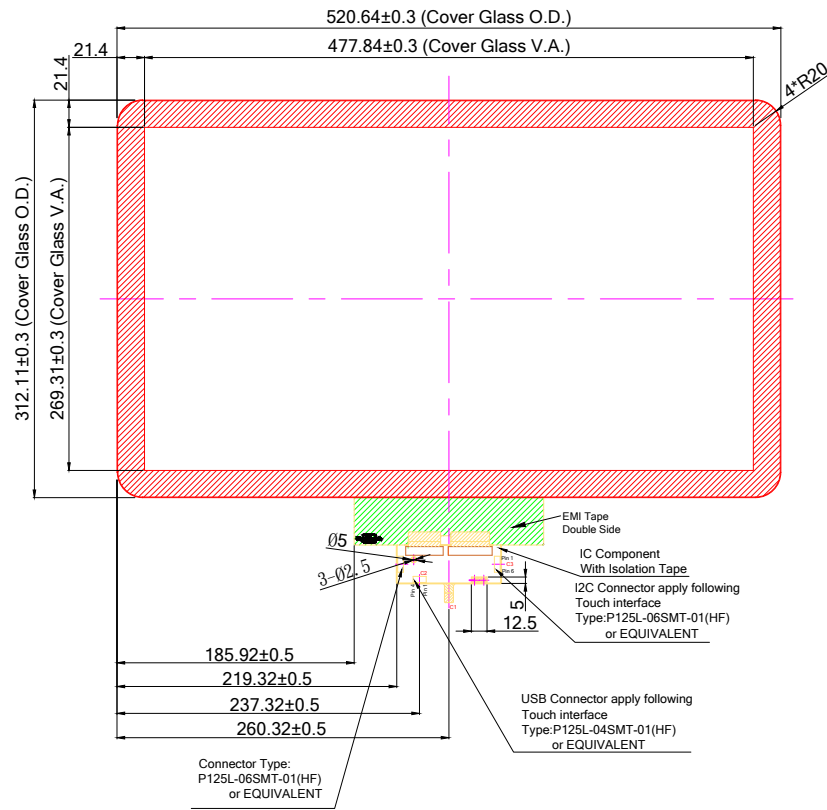

| C1: USB | | C2: USB Connectr 4 pin | | C3: I2C Connectr 6 pin | |
|---------|---------|------------------------|-----|------------------------|---------|
| Pin 01 | XGND | Pin 01 | GND | Pin 01 | XGND |
| Pin 02 | D- | Pin 02 | D- | Pin 02 | SDA |
| Pin 03 | D+ | Pin 03 | D+ | Pin 03 | SCL |
| Pin 04 | VDD(5V) | Pin 04 | VDD | Pin 04 | VDD(5V) |
| Pin 05 | NC | | | Pin 05 | INT |
| Pin 06 | RSTN | | | Pin 06 | RSTN |

- Spec:
- General O.D. Tolerance : ±0.3
 - Border Type : Matt
 - Glass Type : Semi-Tempered
 - Surface treatment : None
 - Background Printing : PMMA Color 1 : Pantone Black C
 - Logo Printing : None
 - Transmittance Level : >85%
 - Important Notes :

Note:

A. Distance between LCD and Touch must be at least 1 mm otherwise touch will not work correctly
 B. If customer put a front cover lens all around he need to use at least 2 mm Thick gasket between touch and metal frame
 C. refer to the integration guide to avoid any integration noise issue
 D. before mass production customer must provide machine for final firmware tuning, or we must test in remote and tune final firmware

| | | | | | | | |
|-------------------|---------------|-------------|-----------|--|----------|------|-------------|
| Customer Approval | | Part Number | | RTPC215WF1-R1-30001-C | | | |
| Date | Rev. | Date | Person | Description | | | |
| Company | | | | | | | |
| Name | v5 | 20190408 | Kevin | Update Touch Interface in Note | | | |
| Signature | v4 | 20190329 | Jeff | Modify Cover Glass Round Corner & Film Corner Design | | | |
| | | Date | Design By | Date | Check By | Date | Approved By |
| | First Drawing | 20180612 | Jeff | | | | |