


Front VIEW

Back VIEW

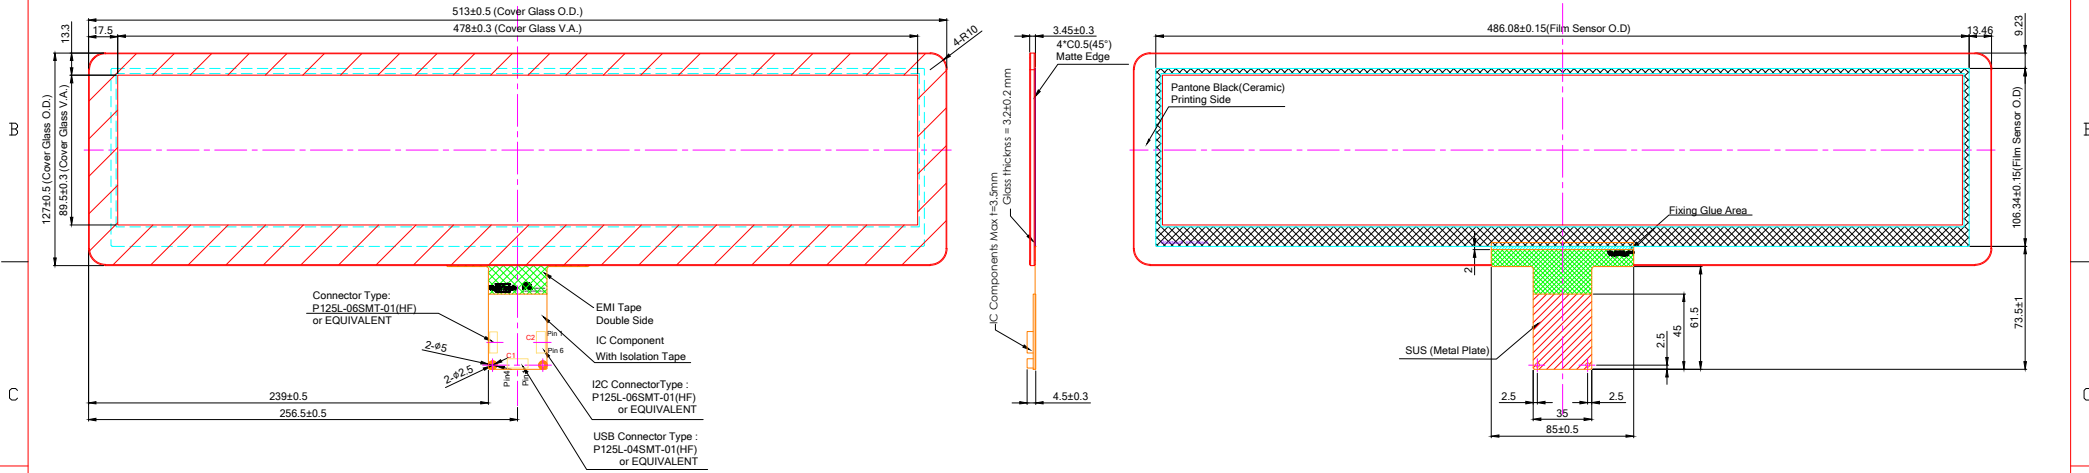

C1: Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD

C2: Pin Define for I2C 6 pin	
Pin 01	GND
Pin 02	SDA
Pin 03	SCL
Pin 04	VDD(5V)
Pin 05	INT
Pin 06	RST

- Spec:
- General O.D. Tolerance : ±0.3
 - Border Type : Matte
 - Glass Type : Fully-Tempered
 - Surface treatment : None
 - Background Printing : Ceramic
 - Logo Printing : None
 - Transmittance Level : >85%
 - Important Notes :
- Color 1 : Pantone Black

Note:

- Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen
- If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference
- Refer to the integration guide to avoid any integration noise issue
- Before mass production customer needs to ask custom firmware for his final machine

Customer Approval		Part Number		RTPC192W-R32BC1-C					
Date		Rev	Date	Person	Description				
Company									
Name									
Signature		Date	Design By	Date	Check By	Date	Approved By		
		First Drawing	20190802	Jeff					