Front VIEW

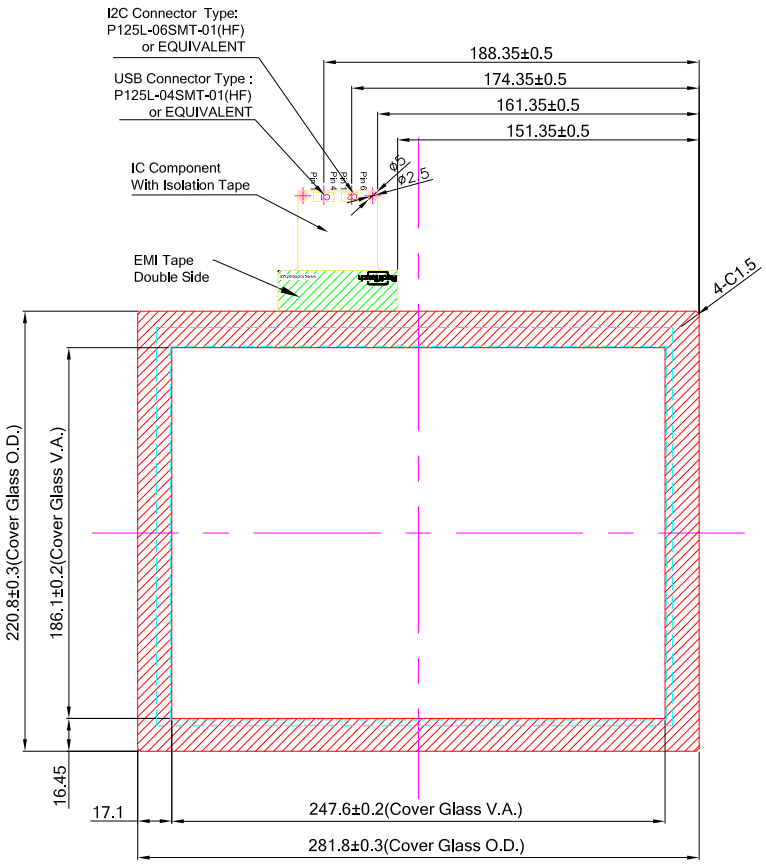

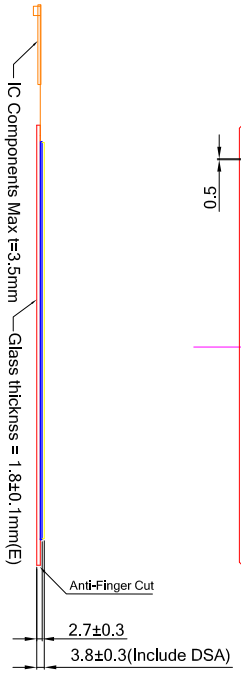

Back VIEW

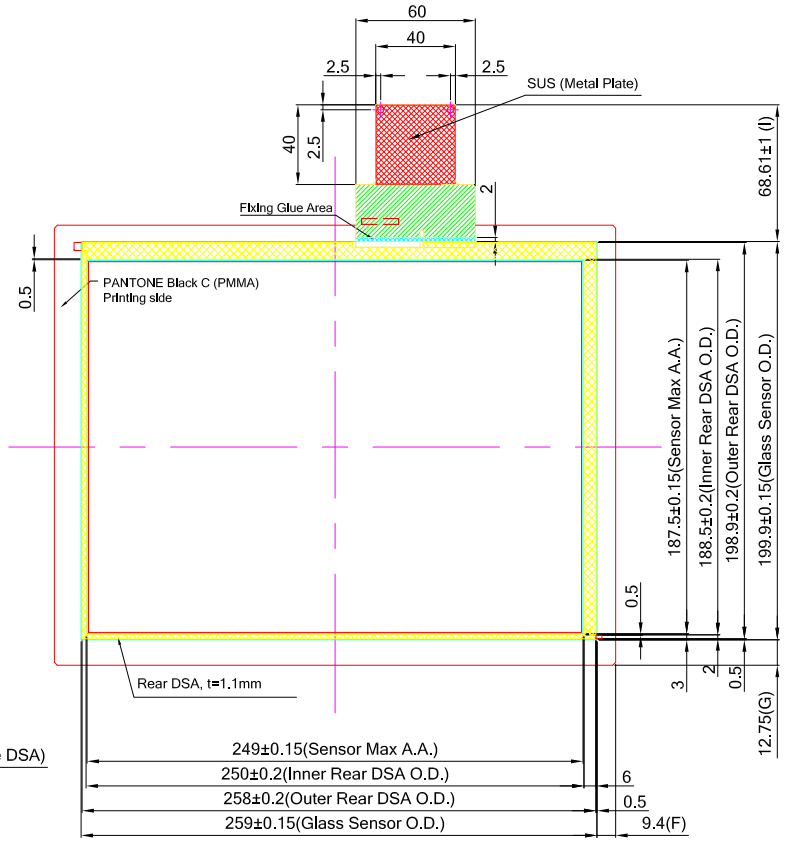

C1: Pin Define for USB 4 pin		C2: Pin Define for I2C 6 pin	
Pin 01	GND	Pin 01	GND
Pin 02	D-	Pin 02	SDA
Pin 03	D+	Pin 03	SCL
Pin 04	VDD	Pin 04	VDD(5V)
		Pin 05	INT
		Pin 06	RST

Spec:
1. General O.D. Tolerance : V ±0.3
2. Border Type : V Matte
3. Glass Type : V C.S.
4. Surface Treatment : V None
5. Backgroud Printing : V PMMA V Color 1 : Pantone Black C
6. Logo Printing : V None
7. Transmittance Level : >85%
8. Important Notes :

Note:
A. Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen
B. If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference
C. Refer to the integration guide to avoid any integration noise issue
D. Before mass production customer needs to ask custom firmware for his final machine

Customer Approval		Part Number # REV	RTPC121-0001-C	#00
Date		Drw.Ver.	Date	Person	Description
		v07	20211203	Matt	Modify Rear DSA information
		v06	20210628	Jeff	Change Rear DSA from 4 stripe to L Shape
Company		v05	20210622	Jeff	Add Rear DSA 4 Stripe
Name		v04	20210412	Jeff	Move Down the Sensor&COF 0.9mm
Signature		v03	20210409	Jeff	Change COF Position and G Sensor O.D.
			Date	Design By	Date	Check By	Date	Approved By
		First Drawing	20200706	Jeff				

RockTouch