Front VIEW

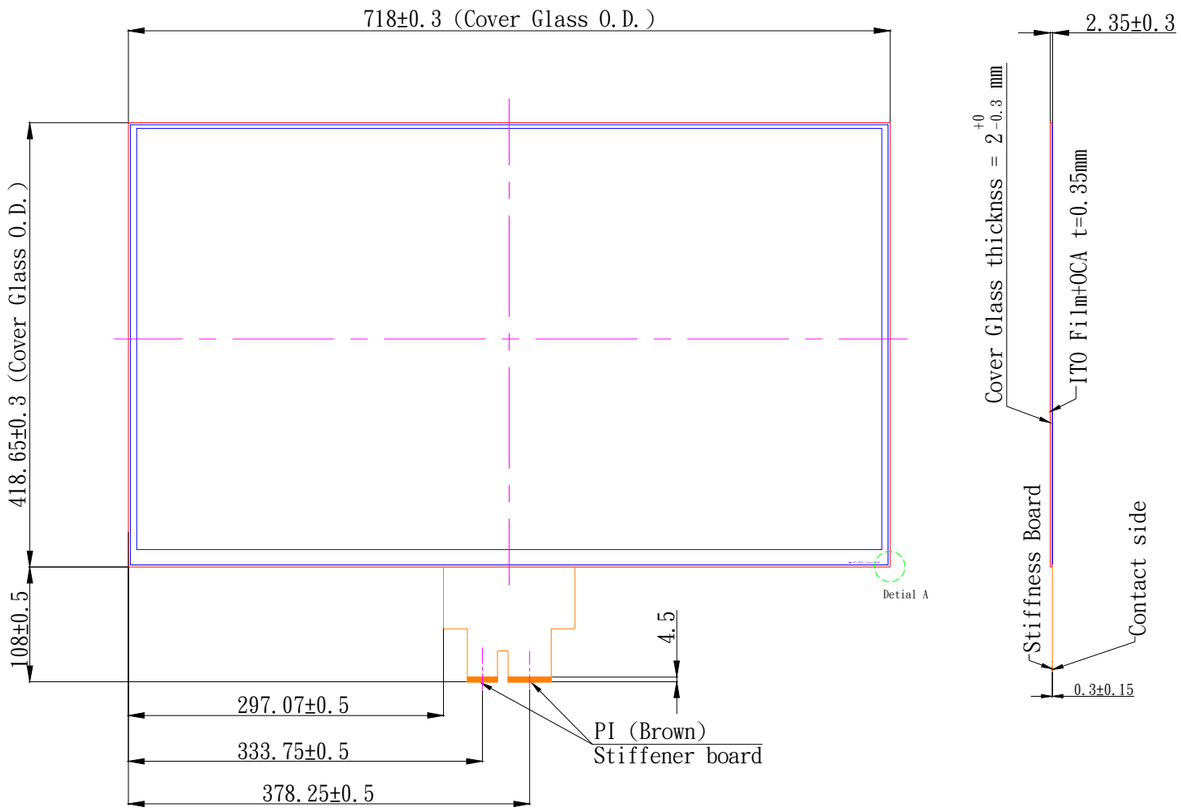

Back VIEW

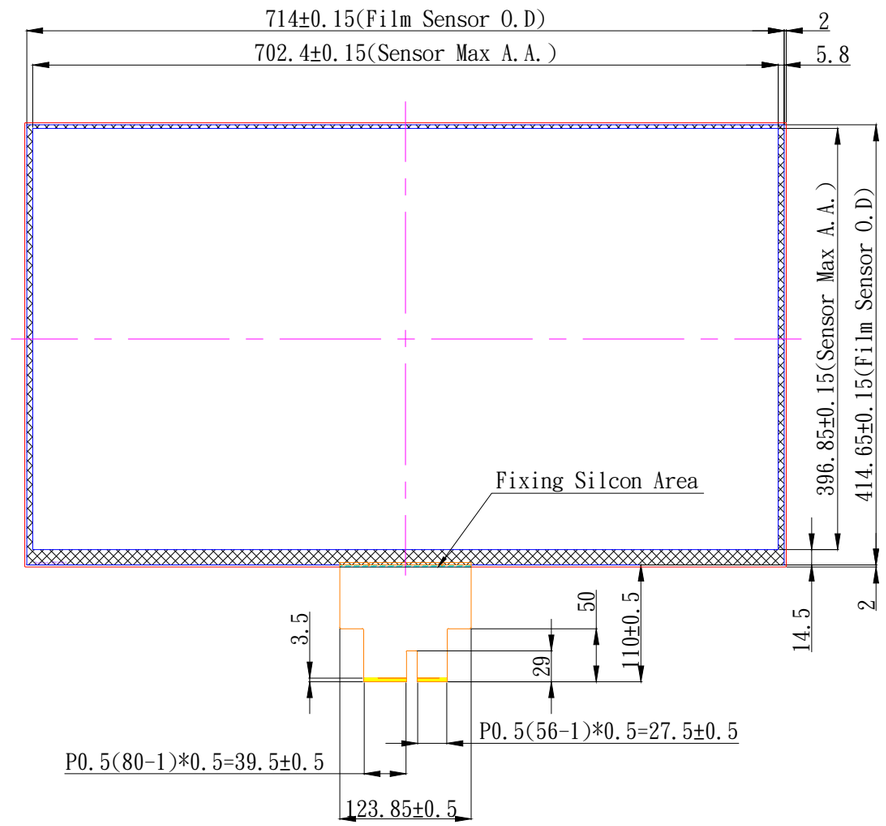



Detial A

Note:
1. Tolerance: +-0.3mm
2. Finger input only or special conductive pen
3. Surface Hardness: 6H (Chemical Strength Glass)
4. Transmittance: >85% (JIS-K7105)
5. Surface Treatment: none
6. Distance between LCD and touch panel need to be minimum 1.0mm otherwise touch maybe will not work correctly
7. If customer put a front cover all around need use at least 2mm thick gasket between touch and metal frame
8. USB max ripple acceptable is 50mV, in other case touch will not work correctly
9. Referring to the integration guide to avoid any integration noise issue

版	年 月 日	設 計	審 查	變 更 內 容
				Modify the part number and FPC O.D.
設 計	2015/05/01	Kevin	審 查	承 認

圖號 RTPC315W-S18TG1

RockTouch

原圖管理元

日期

95.07 FDNC-3505-3