Front VIEW

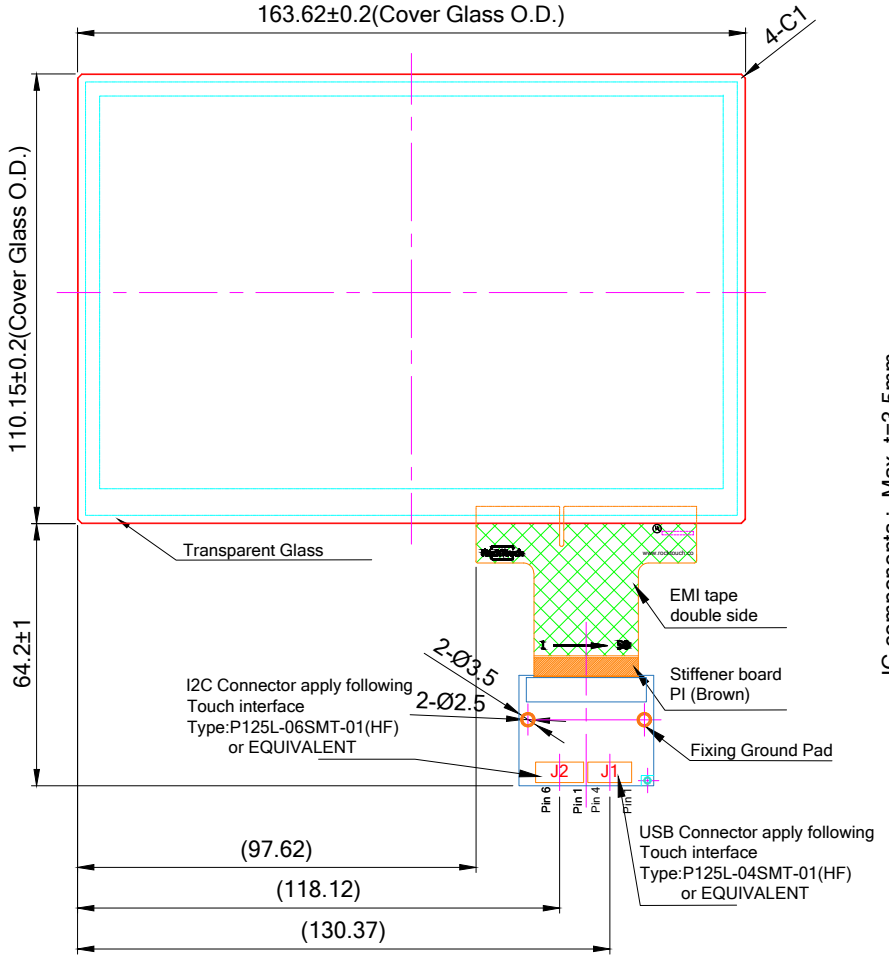

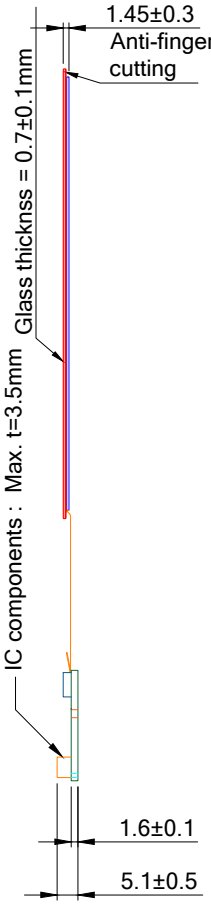

Back VIEW

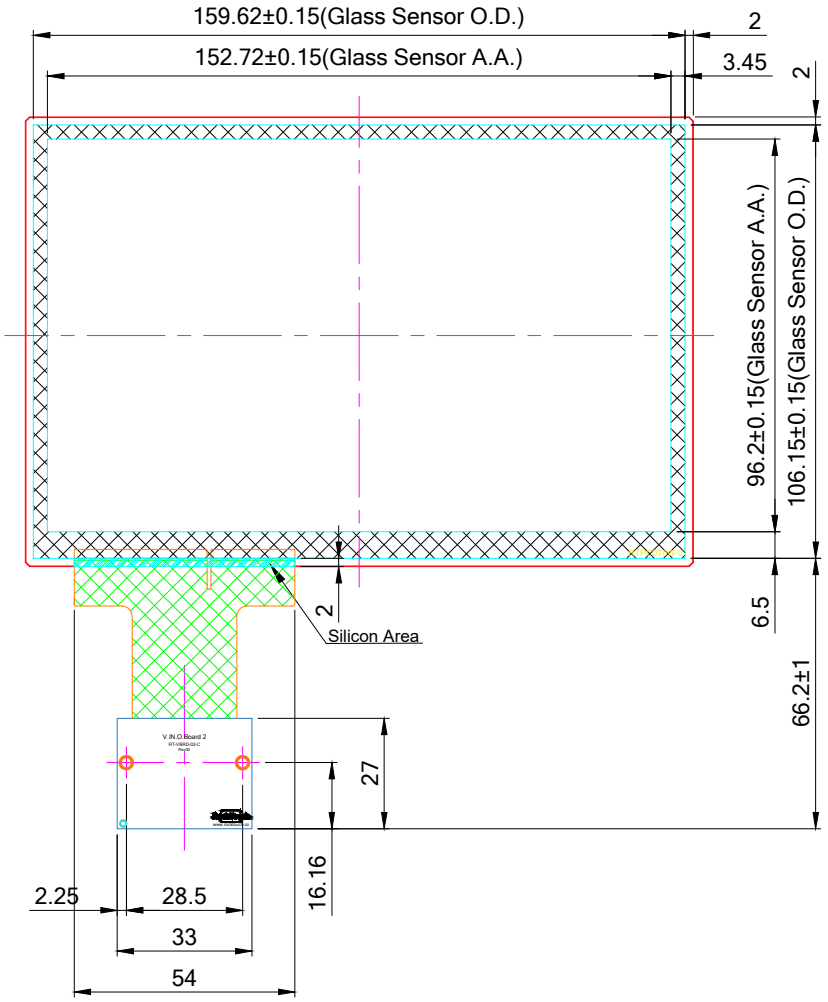

J1:Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD(5V)

J2:Pin Define for I2C 6 pin	
Pin 01	GND
Pin 02	SDA
Pin 03	SCL
Pin 04	VDD(5V/3.3V) (3.2V Min)
Pin 05	INT
Pin 06	RST

Darwing Number

Date

Spec:

1. General O.D. Tolerance : V ±0.3
2. Border Type : V Matte
3. Glass Type : V C.S.
4. Surface Treatment : V None
5. Backgroud Printing : V None
6. Logo Printing : V None
7. Transmittance Level : >85%
8. Important Notes :

Note:

A. Distance between LCD and Touch must be at least 1 mm otherwise touch will not work correctly
B. If customer put a front cover lens all around he need to use at least 2 mm Thick gasket between touch and metal frame
C. refer to the integration guide to avoid any integration noise issue
D. before mass production customer must provide machine for final firmware tuning, or we must test in remote and tune final firmware

Customer Approval		Part Number # Rev.	RTPC070W-0019-C	#00
Date				
Company				
Name				
Signature				

Draw.Ver.	Date	Person	Description

	Date	Design By	Date	Check By	Date	Approved By
First Drawing	20210914	Matt				

RockTouch