


Front VIEW

Back VIEW

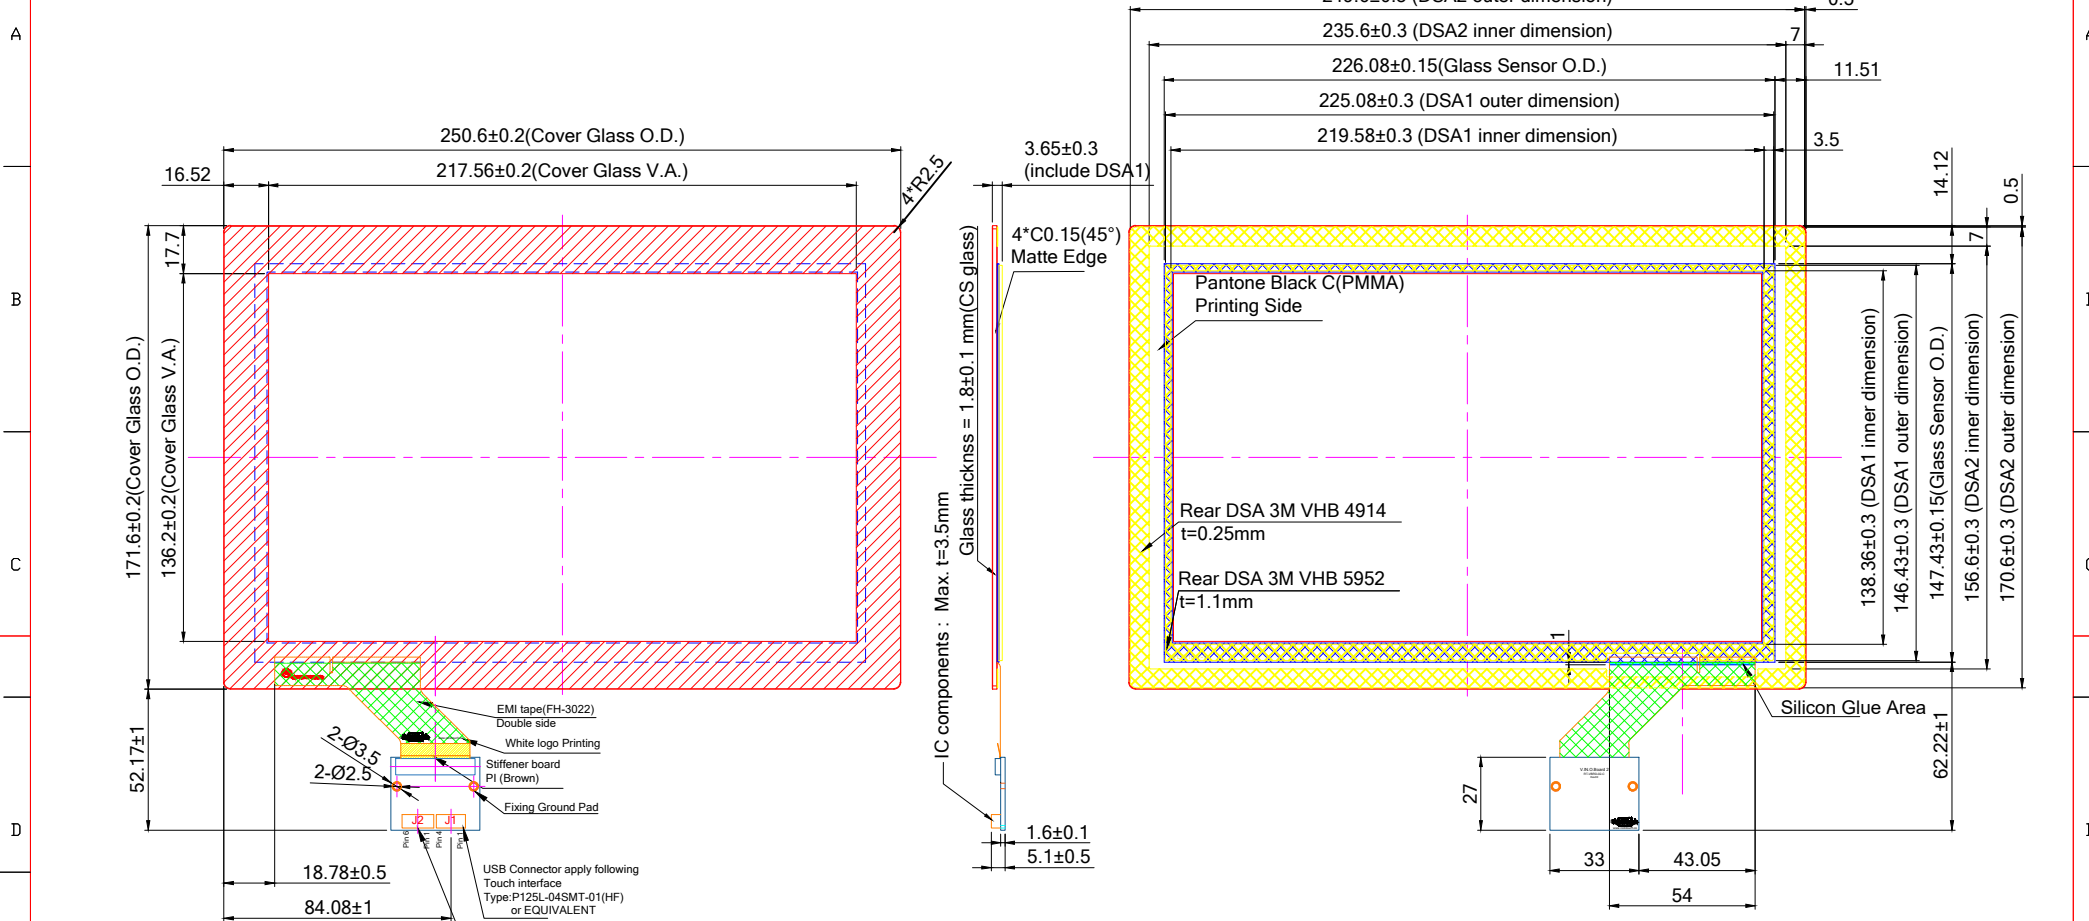

J2:Pin Define for I2C 6 pin		J1:Pin Define for USB 4 pin	
Pin 01	GND	Pin 01	GND
Pin 02	SDA	Pin 02	D-
Pin 03	SCL	Pin 03	D+
Pin 04	VDD(5V/3.3V) (3.2V Min)	Pin 04	VDD(5V)
Pin 05	INT		
Pin 06	RST		

Date _____ Drawing Number _____

- Spec:
- 1. Sensor type: Glass Sensor
 - 2. General O.D. Tolerance: ±0.2
 - 3. Border Type: Matte
 - 4. Glass Type: C.S.
 - 5. Surface Treatment: None
 - 6. Background Printing: PMMA Color 1: Pantone Black C
 - 7. Transmittance Level: >85%

Note:

- A. Distance between LCD and Touch must be at least 1 mm otherwise touch will not work correctly
- B. If customer put a front cover lens all around he need to use at least 2 mm Thick gasket between touch and metal frame
- C. refer to the integration guide to avoid any integration noise issue
- D. before mass production customer must provide machine for final firmware tuning, or we must test in remote and tune final firmware

Customer Approval		Part Number		RTPC101W-0010-C		#00	
Date	Rev	Date	Person	Description			
Company							
Name							
Signature	Date	Design By	Date	Check By	Date	Approved By	
	20210914	Jeff					