
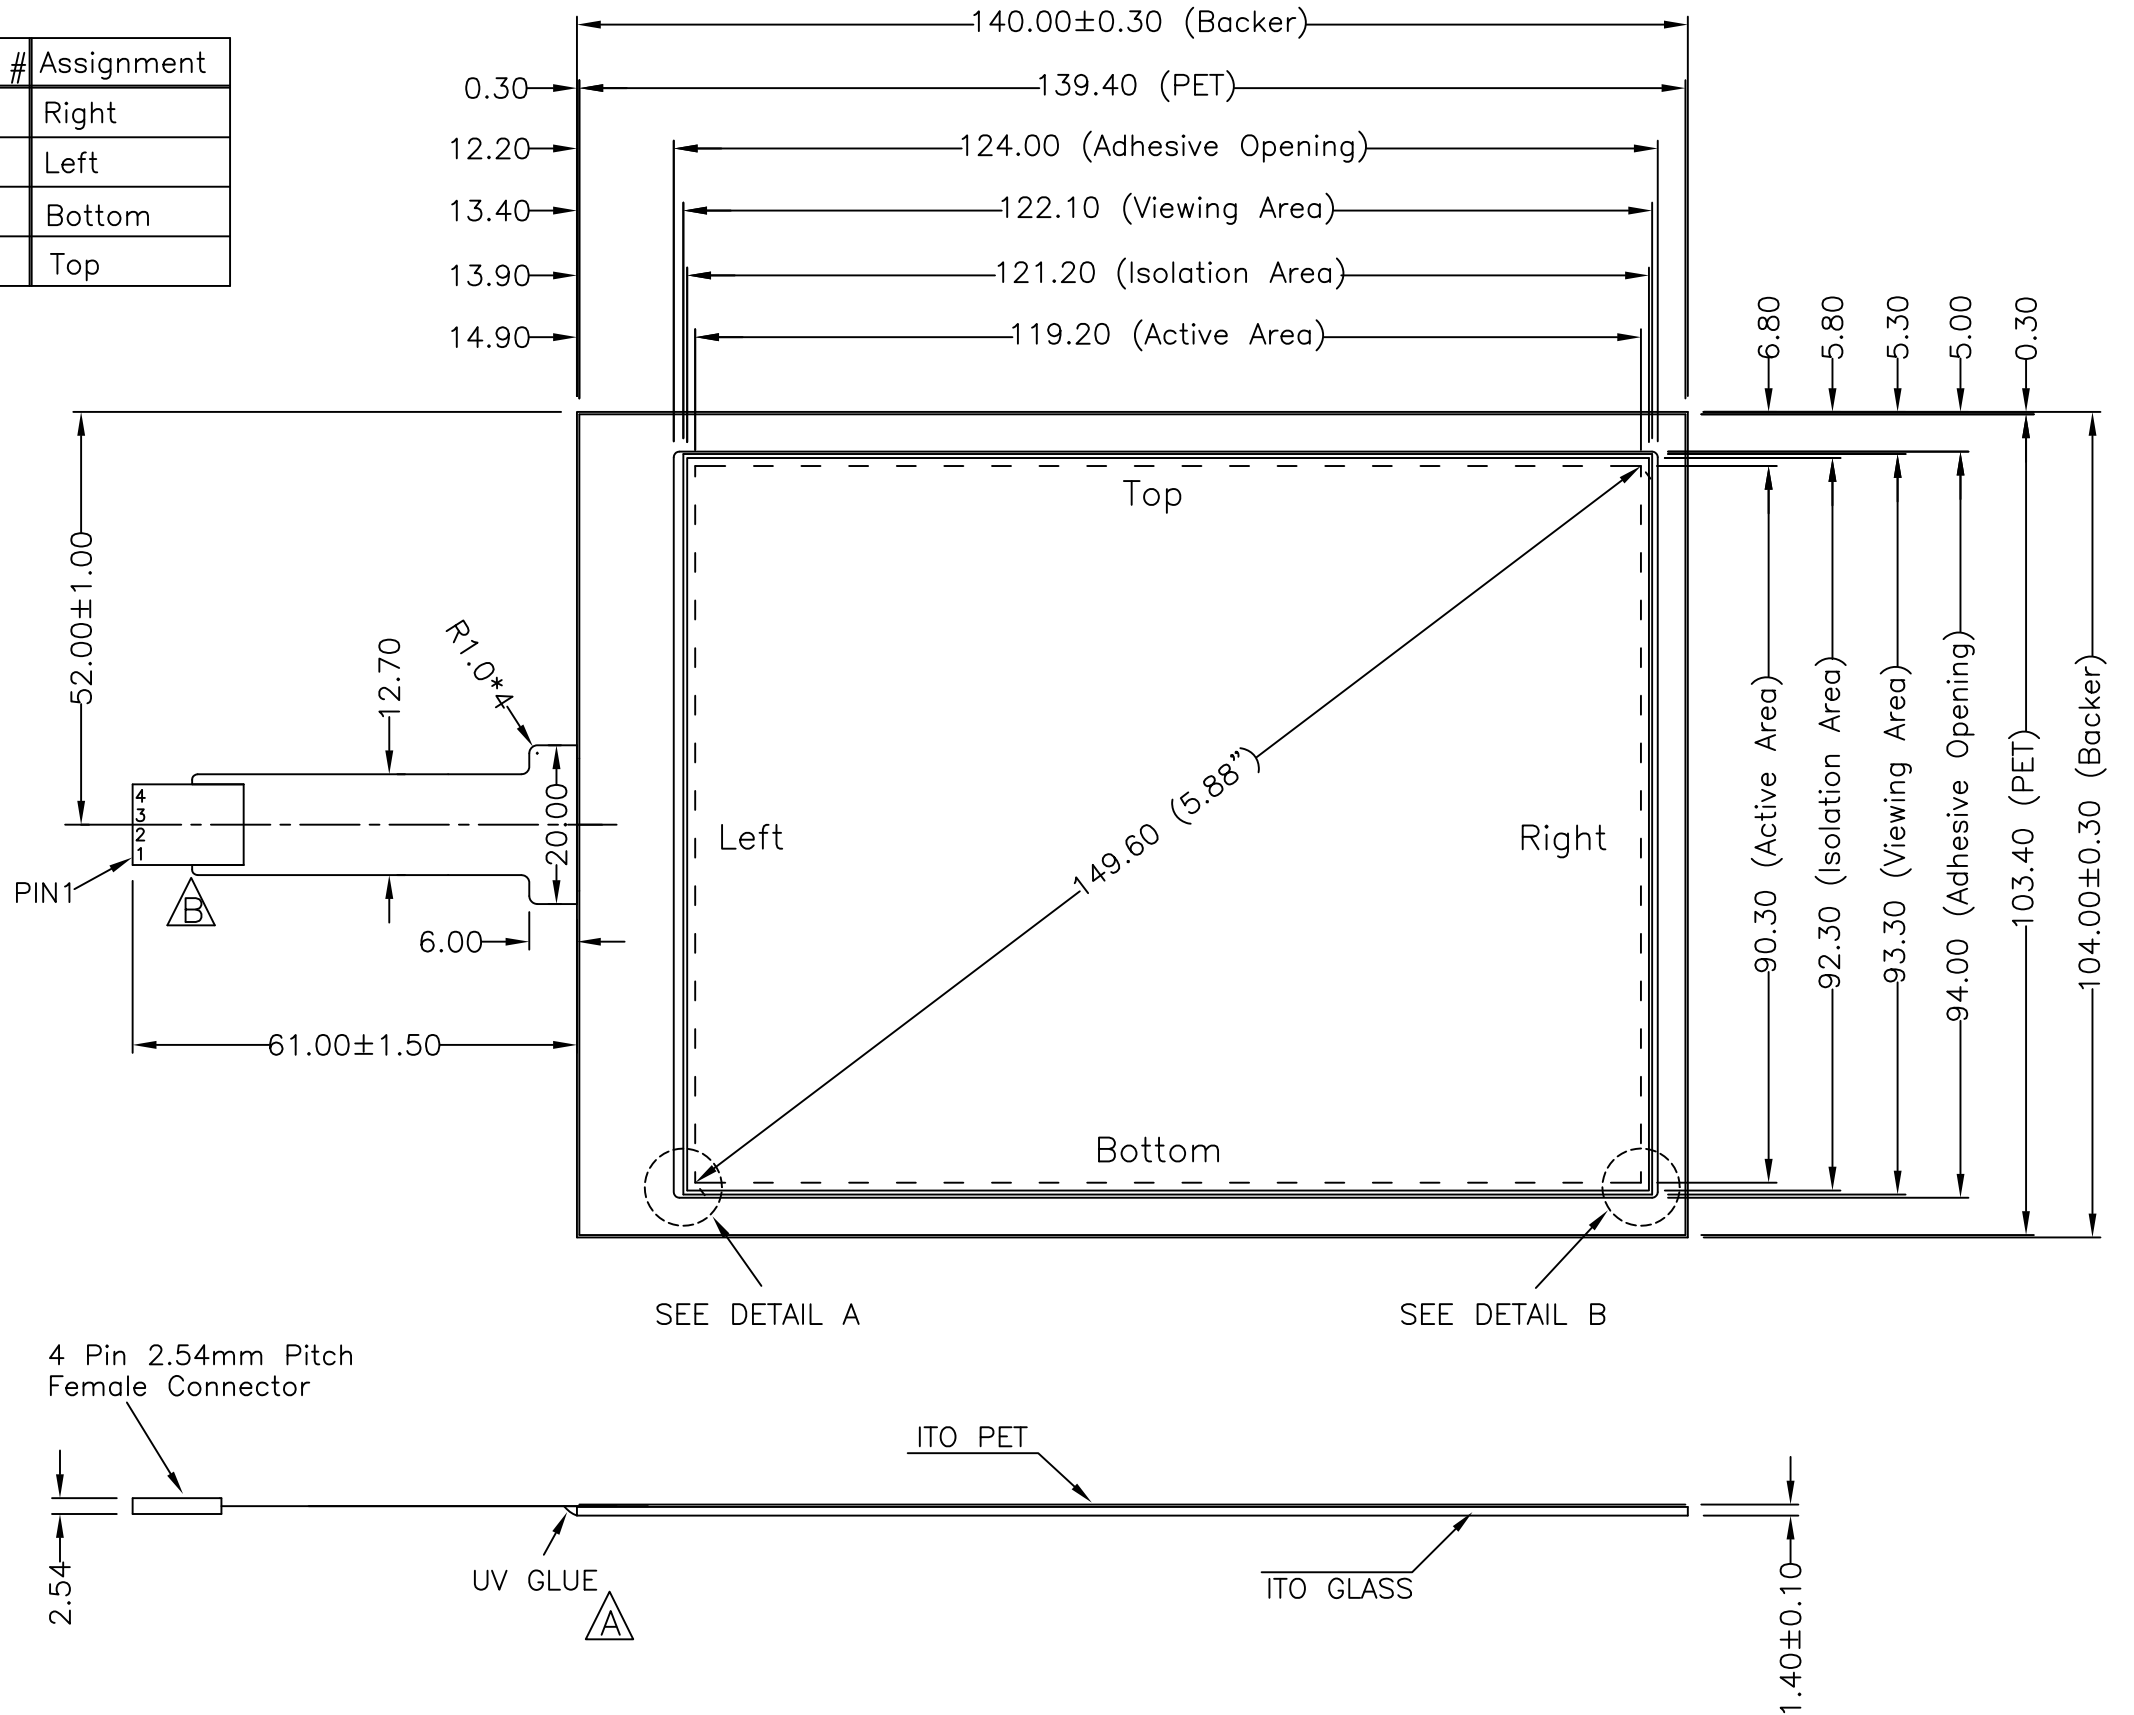
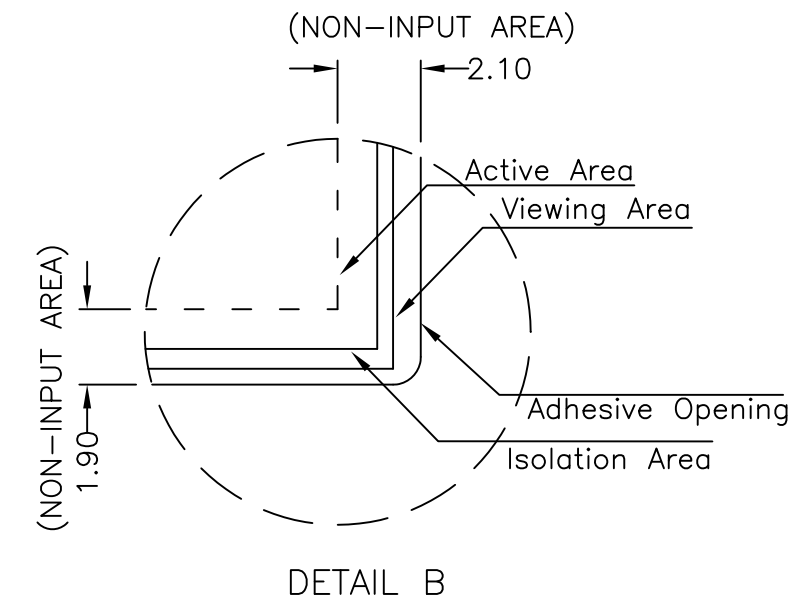


FRONT VIEW

Pin #	Assignment
1	Right
2	Left
3	Bottom
4	Top

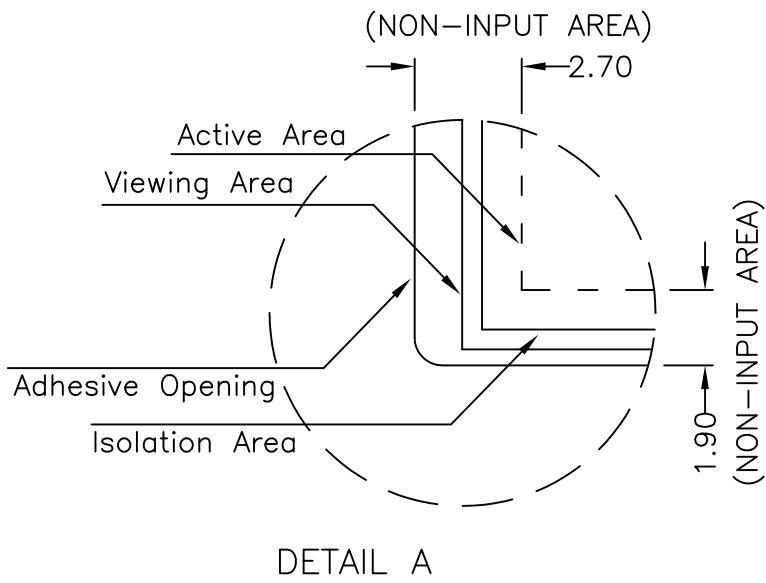

NOTES:

- ITO GLASS THICKNESS : 1.10mm
 - OVERALL THICKNESS : 1.40±0.10mm
 - CONNECTOR AND PINOUT AS INDICATED
 - FRONT SURFACE : ANTI-GLARE HARDCOAT
 - LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.30mm
 - TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
 - OTHER SPEC : SEE APPROVAL SHEET
- *BEFORE DESIGN PLEASE REFER TO THE INTEGRATION GUIDE



NO.	DATE	DESCRIPTION	CHK
C	DEC 30 , 2005	CIRCUIT DESIGN MODIFY	ALEX
B	MAY 26 , 2005	CONDUCTOR GOLD PLATING	ALEX
A	AUG 16 , 2004	ADD UV GLUE TO TAIL LOCATION	ALEX

REVISION			
CHIEF OF DESIGN		APPROVED	Grace
ENGINEER		PROJECT MANAGER	
DRAWN BY	Bruce	DATE	May. 08, 2012
SHT	1 OF 1	REV.	C

Apex Material Technology Corp

TOLERANCES UNLESS SPECIFIED		PROJECT NAME : 9523
.X	± 0.50	
.XX	± 0.50	
.XXX	± 0.30	
ANGULAR	.	

DWG NO : 9523-3-011
SCALE: 1:1 UNIT: mm