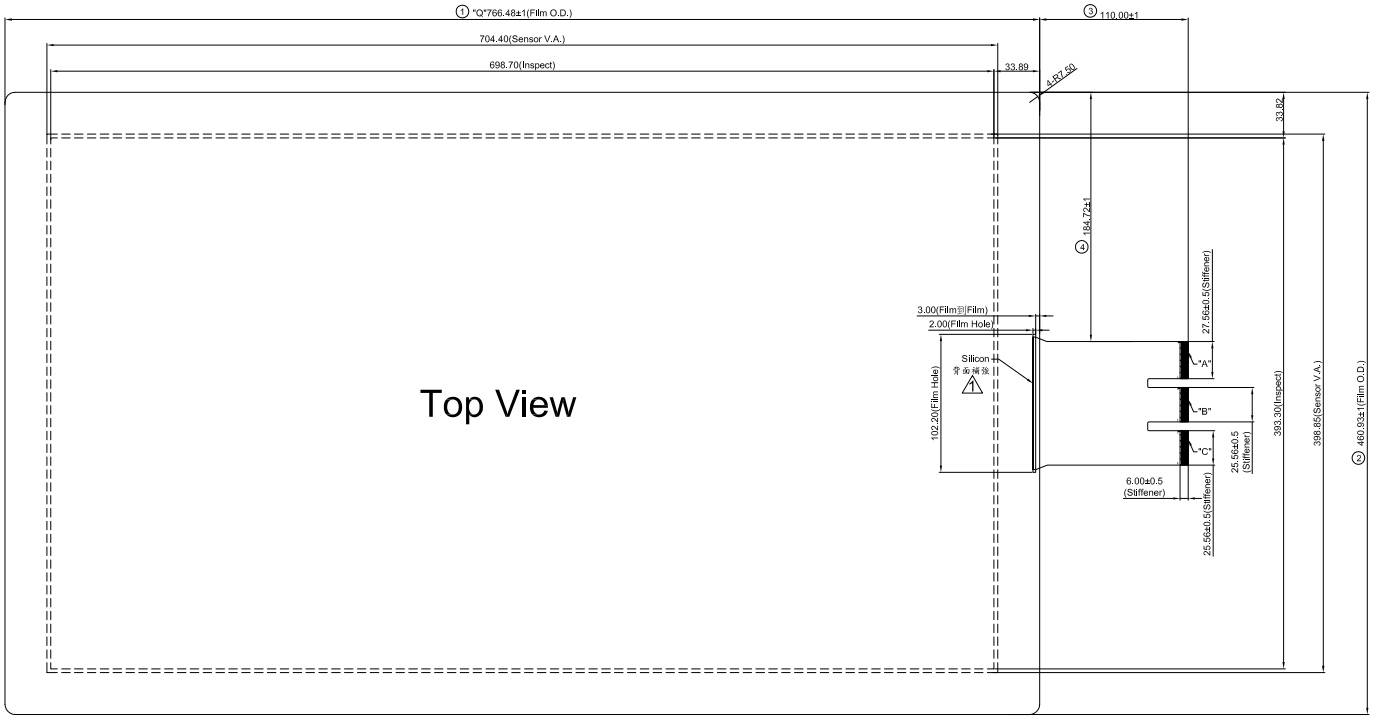

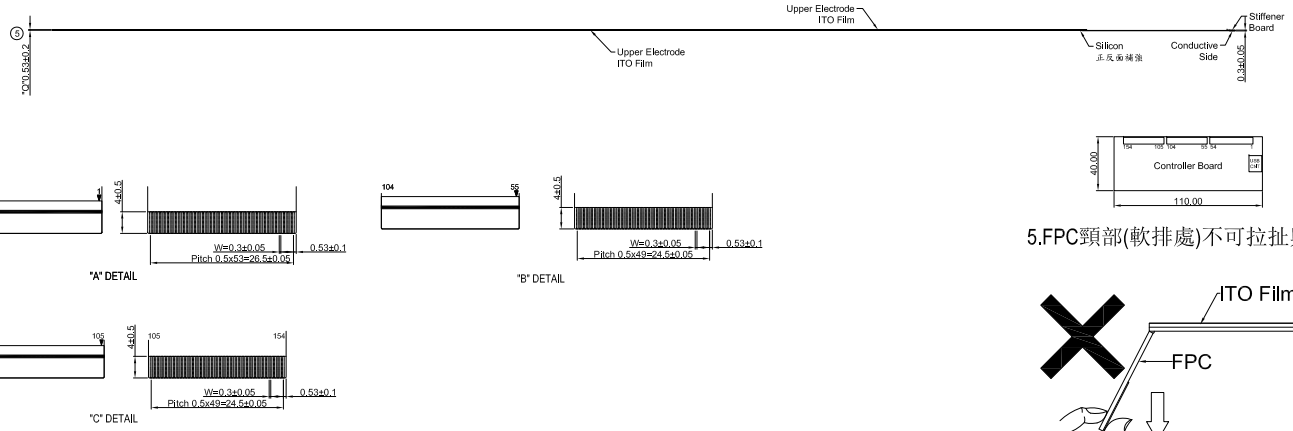

1. TOUCH PANEL PIN ASSIGNMENT

X軸	Pin 55~154
Y軸	Pin 1~54

2. MATERIAL CHARACTERISTICS

Property	Requirement
Light transmission	87±2%
Operating temperature	-20~70° C
Storage temperature	-20~70° C
Operating Humidity	20~80% RH
Storage Humidity	30~80% RH

3.有標示"Q"之尺寸為重點量測尺寸

4.Tolerance no specified: ± 0.5mm

5.FPC頸部(軟排處)不可拉扯與死折



SYMBOL	DATE	REVISED DESCRIPTIONS	NOTE	CUSTOMER APPROVED
D01.1	2017.04.12	⚠修改標註		
D01.1	2016.05.17	新發行		

榮茂光學股份有限公司 MILDEX OPTICAL INC.				
APPROVED	CHECK	DRAWN	DWG-NO	M316H11-D01.1
劉子德	黃曜晨	鄭金蓮	SCALE	——
			UNIT	mm
			DATE	2017.04.12
			SHEET NO.	1 / 1