


Front VIEW

Back VIEW

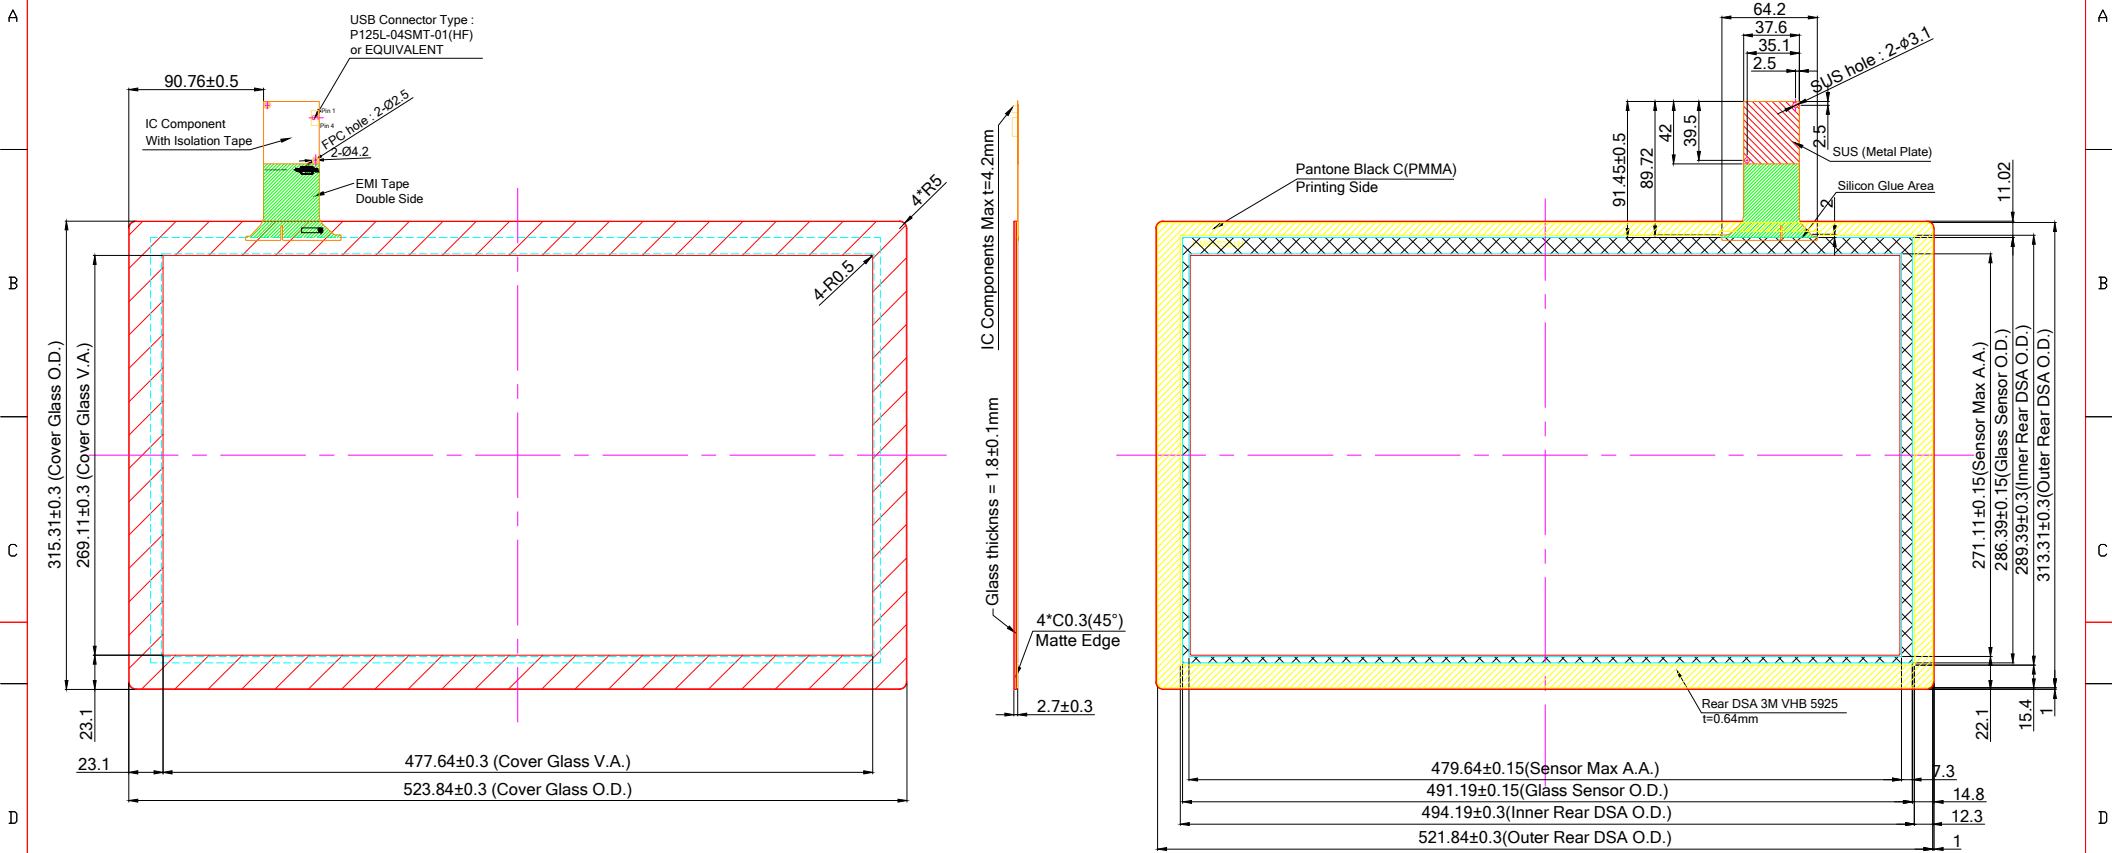

C1: Pin Define for USB 4 pin

Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD

- Spec:
- 1. General O.D. Tolerance : ±0.3
 - 2. Border Type : Matte
 - 3. Glass Type : C.S.
 - 4. Surface treatment : None
 - 5. Background Printing : PMMA Color 1 : Pantone Black C
 - 6. Logo Printing : None
 - 7. Transmittance Level : >85%
 - 8. Important Notes :

Note:

- A. Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen
- B. If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference
- C. Refer to the integration guide to avoid any integration noise issue
- D. Before mass production customer needs to ask custom firmware for his final machine

Customer Approval		Part Number # Rev.		RTPC215W-0008-U		#00	
Date	Draw. Ver.	Date	Person	Description			
	01	20211210	Matt	Modify DSA & CG Outline Dimension			
Company	02	20211217	Matt	Correct Front View COF Position			
Name	03	20221008	Matt	Correct Chamfer Line & Rear DSA Outline Dimension			
	04	20221102	Matt	Correct Rear DSA PN			
Signature	Date	Design By	Date	Check By	Date	Approved By	
	First Drawing	20211208	Jeff				