
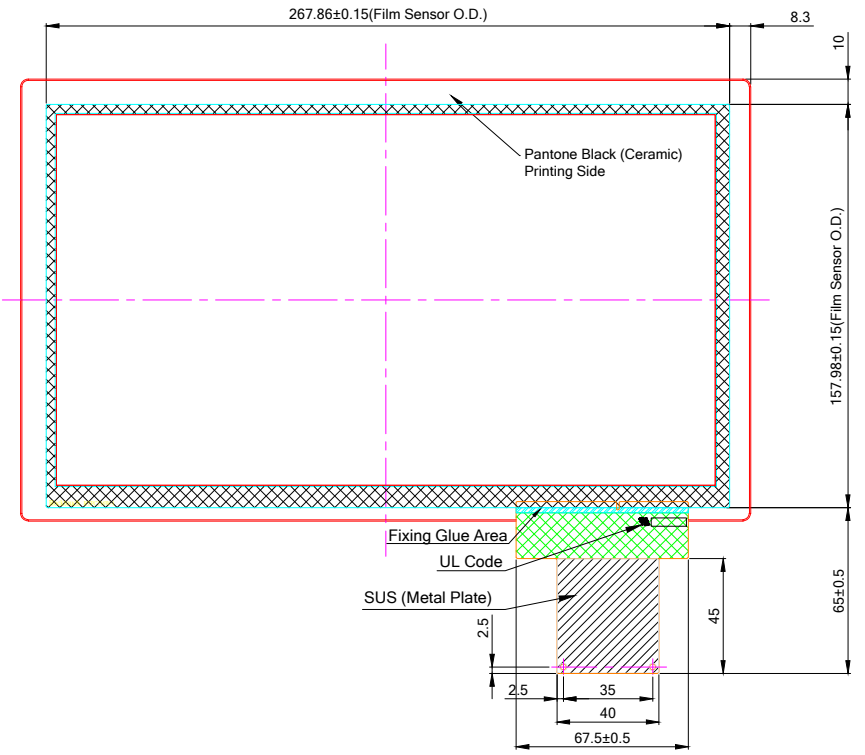


Front VIEW

Back VIEW

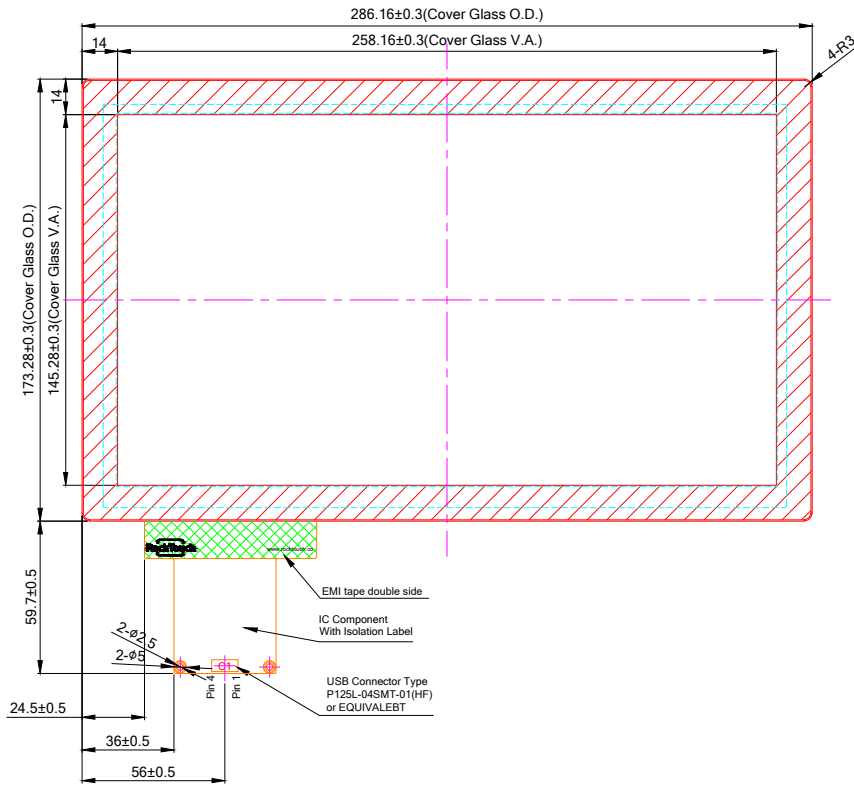

C1: Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD

- Spec:
- General O.D. Tolerance :  ±0.3
  - Border Type :  Matte
  - Glass Type :  Fully-Tempered
  - Surface treatment :  None
  - Background Printing :  Ceramic  Pantone Black
  - Logo Printing :  None
  - Transmittance Level : >85%
  - Important Notes :

- Note:
- Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen
  - If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference
  - Refer to the integration guide to avoid any integration noise issue
  - Before mass production customer needs to ask custom firmware for his final machine

Customer Approval		Part Number		RTPC116W-0000		#00	
Date		Rev	Date	Person	Description		
Company		v3	20201123	Jeff	Remove Rear DSA		
Name		v2	20200511	Jeff	Change COF Position& Add Rear DSA		
Signature		v1	20200502	Matt	Modified COF thickness from 3mm to 4mm		
			Date	Design By	Date	Check By	Date
			20200721	Matt			Approved By

