


Front VIEW

Back VIEW

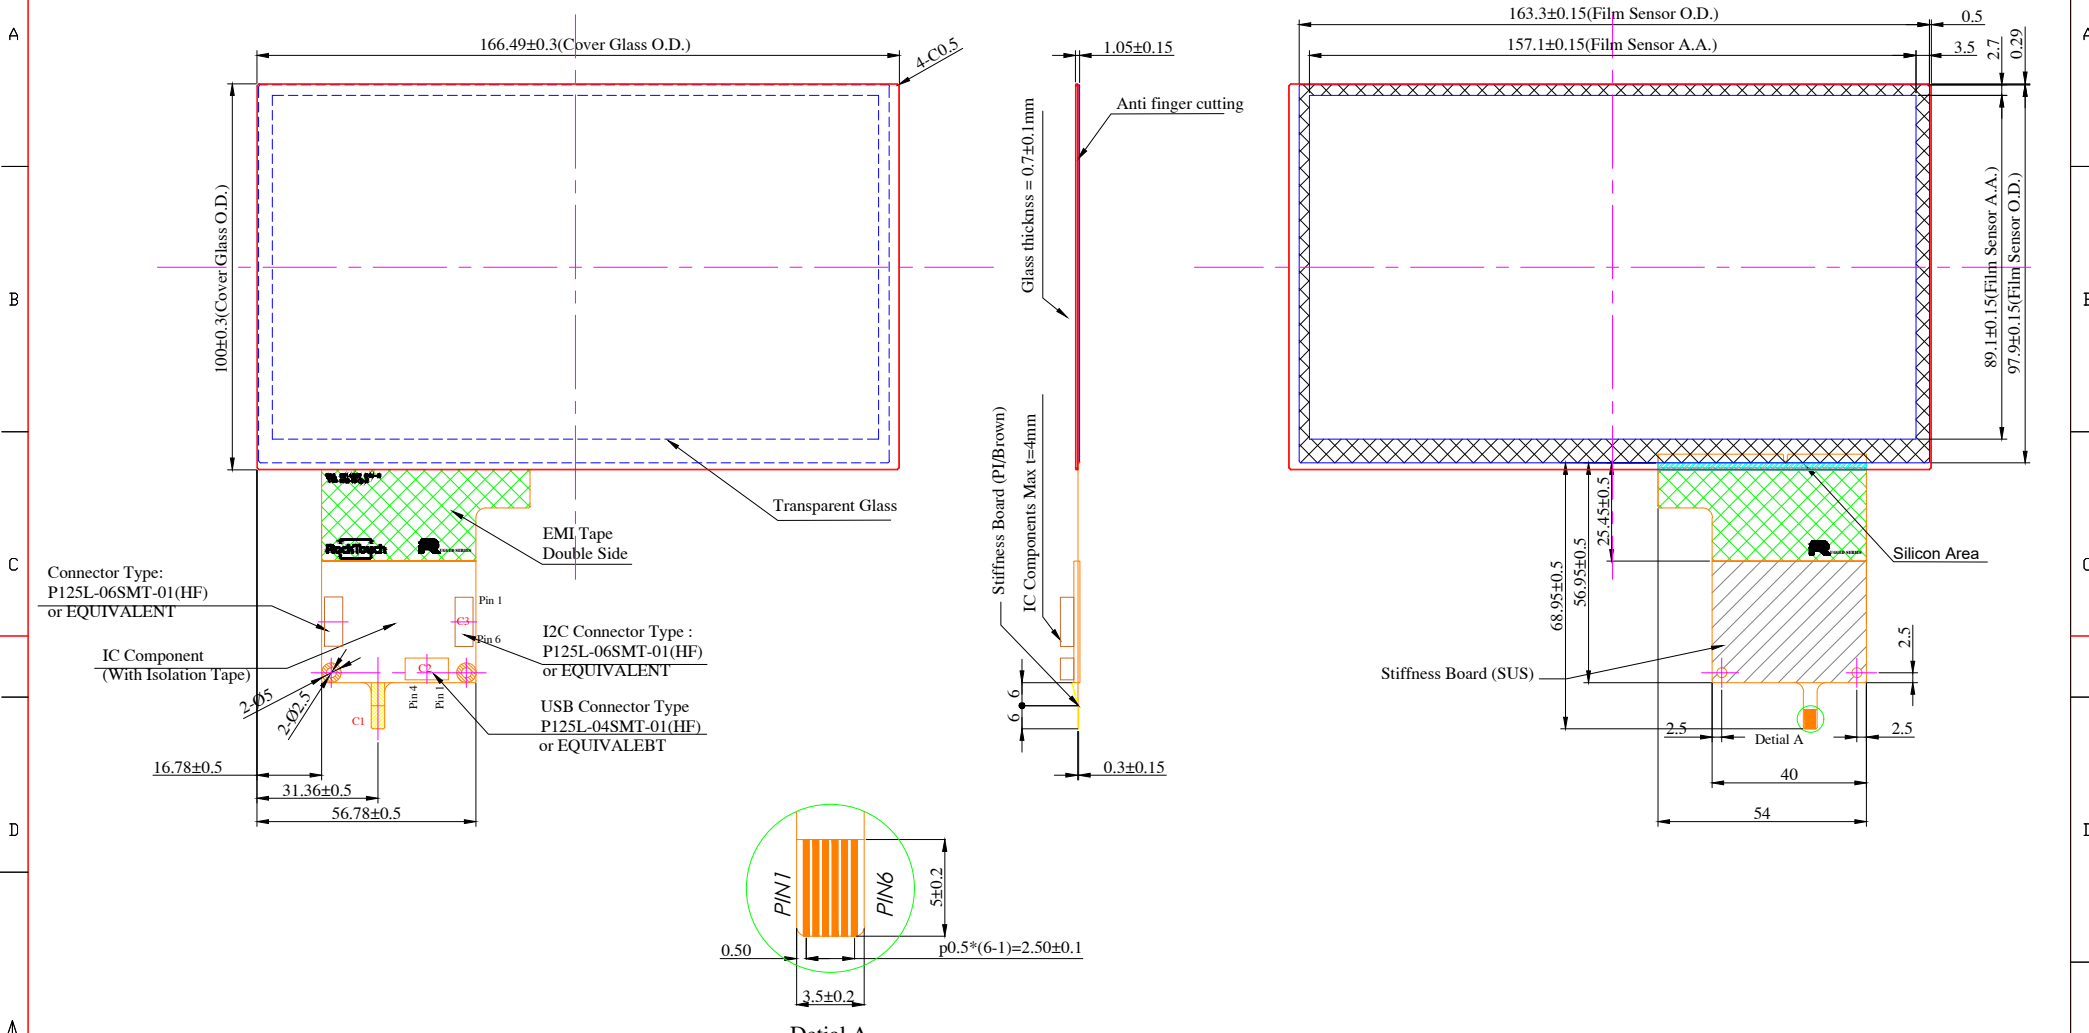

Date _____
 Drawing Number _____

- Spec:
- 1. General O.D. Tolerance : ±0.3
 - 2. Border Type : Matte
 - 3. Glass Type : C.S.
 - 4. Surface Treatment : None
 - 5. Background Printing : None
 - 6. Logo Printing : None
 - 7. Transmittance Level : >85%
 - 8. Important Notes :

Note:

- A. Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen
- B. If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference
- C. Refer to the integration guide to avoid any integration noise issue
- D. Before mass production customer needs to ask custom firmware for his final machine

| C1:USB Interface | | C2: Pin Define for USB 4 pin | | C3: Pin Define for I2C 6 pin | |
|------------------|---------|------------------------------|-----|------------------------------|---------|
| Pin 01 | VDD(5V) | Pin 01 | GND | Pin 01 | GND |
| Pin 02 | D- | Pin 02 | D- | Pin 02 | SDA |
| Pin 03 | D+ | Pin 03 | D+ | Pin 03 | SCL |
| Pin 04 | GND | Pin 04 | VDD | Pin 04 | VDD(5V) |
| Pin 05 | RST | | | Pin 05 | INT |
| Pin 06 | NC | | | Pin 06 | RST |

| Customer Approval | | Part Number | | RTPC070WF1-R07TG1-C | |
|-------------------|--|-------------|----------|---------------------|--|
| Date | | Rev | Date | Person | Description |
| Company | | | | | |
| Name | | V2 | 20191216 | Mat | Add sensor A.A. dimension |
| Signature | | V1 | 20191030 | Jeff | Reduce the cover glass outline dimension |
| | | | Date | Design By | Date |
| | | | Date | Check By | Date |
| | | | Date | Approved By | |
| | | | 20191007 | Jeff | |

